

BRUNNER FIREPLACES





Architektur-Tunnel 53/121

State: 2018-01-24





BRUNNER[®]
made in germany.

Dimension sheets - Architektur-Tunnel 53/121

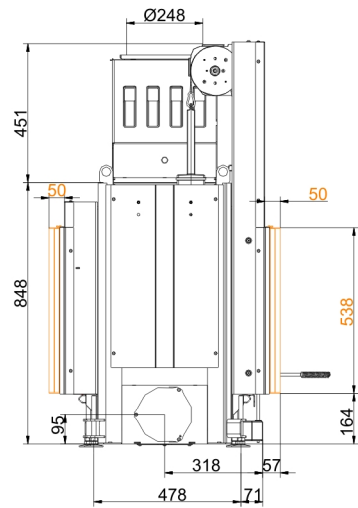
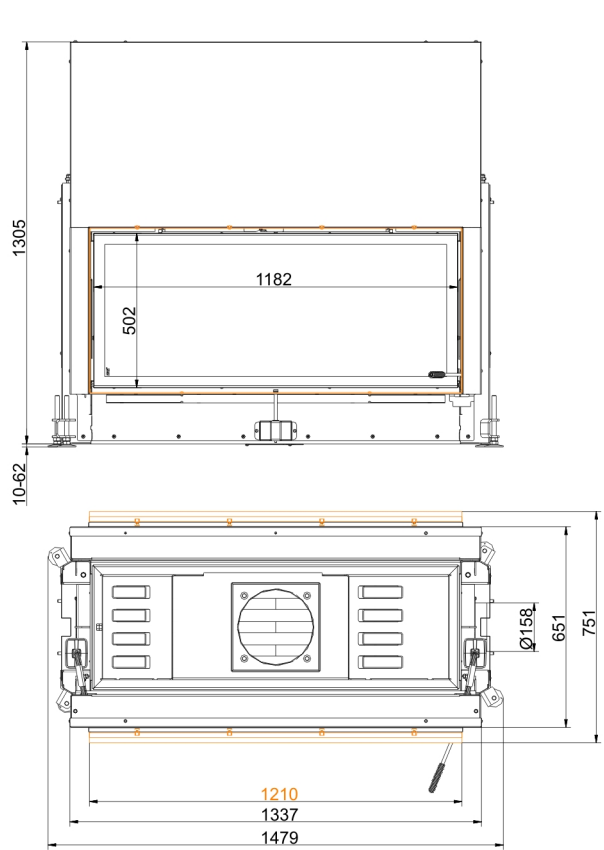


... /tilting door with mounting frame 50 mm

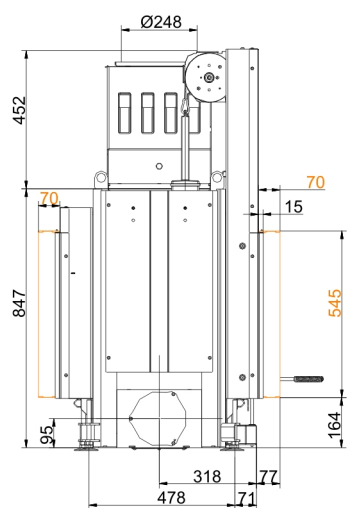
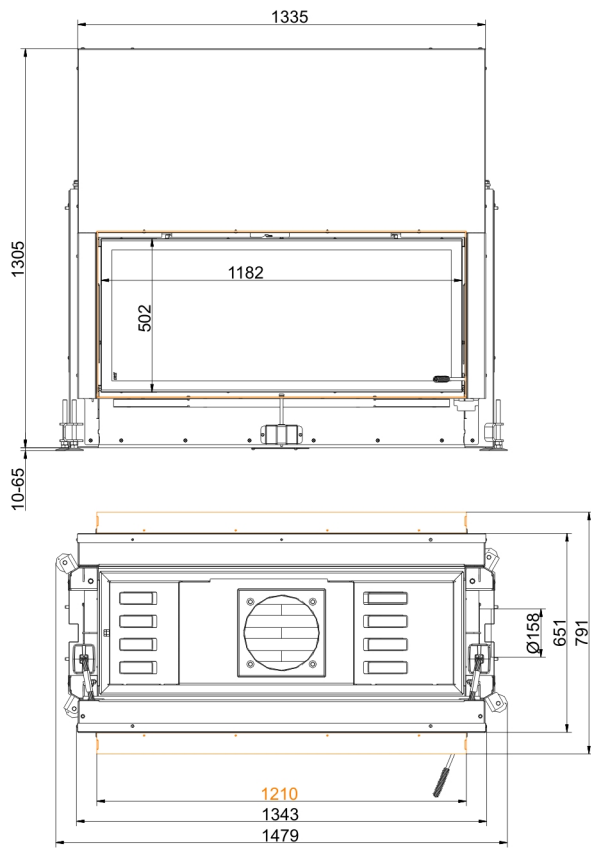


... /tilting door with mounting frame 70 mm

Dimension sheets - Architektur-Tunnel 53/121

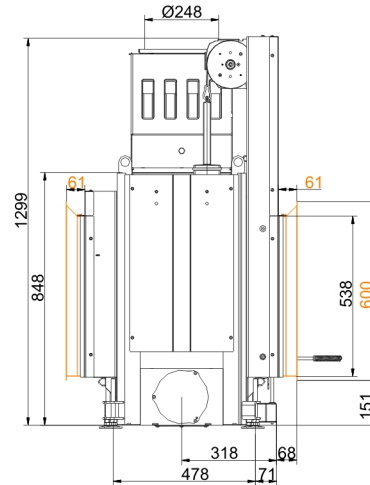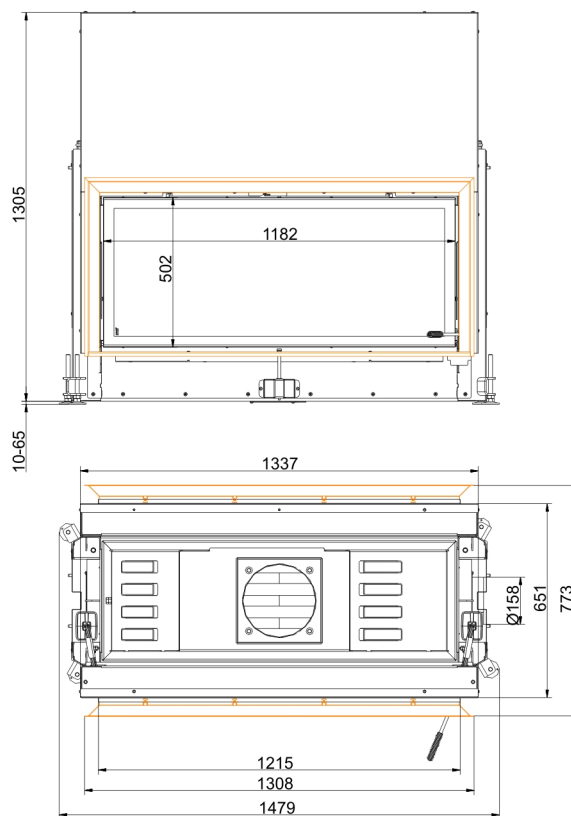

... /tilting door with door frame

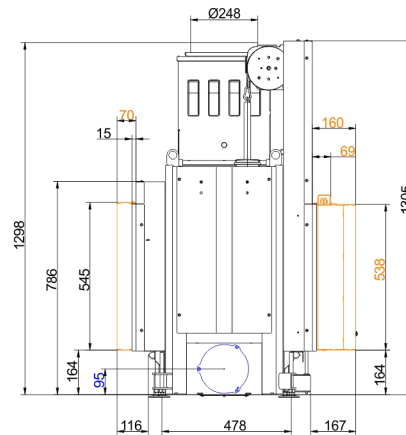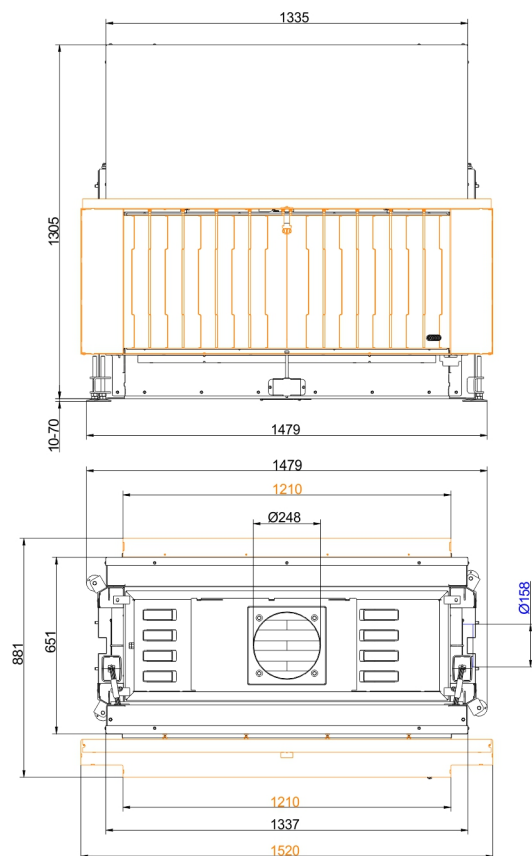

... with heatSTOP®

We suggest for CAD planing Palette CAD. Permanent updated drawings: www.brunner.de
Frames / front versions are marked colored.

Planning and installation - Architektur-Tunnel 53/121

Tested according to		EN 13229 W
Values measured at		Rated capacity
Suitable for all construction types according to rules		OK
EEI		102.9
Data for functional demonstration		
Rated heat power	kW	13.5
Fire wood volume	kg/h	4.3
Combustion performance	kW	17
Flue gas mass flow	g/s	12
Flue gas temperature after:		
attached steel smoke hood	°C	205
Necessary supply pressure	Pa	12
Combustion air consumption	m³/h	45
Combustion air connection Ø	mm	160
Heat distribution		
Insert / heat accumulator	%	50 / -
Glass pane (single / double)	%	50 / -
Cross-section of gratings ¹⁾		
Supply air	cm²	800 / 100 / -
Warm air	cm²	800 / 100 / -
Minimal oven surface for closed construction type		
Heat dissipating surface	m²	4.5
Min. distances of fireplace without / with convection casing		
to insulation layer	cm	8
to mounting floor	cm	2
Thermal insulation without / with air gratings ²⁾		
Mounting wall	cm	16 / 12
Floor	cm	4 / 2
Ceiling	cm	25 / 18
Brick lining for combustible wall	cm	10
Weight		
Fireplace / combustion room	kg	354 / 81 / -
Meets requirement/limit values for:		
Germany/ Austria / Suisse / Norway		1.BImSchV (Stufe 2) / 15a BVG (2015) / LRV / -

1) for fireplace inserts / flue gas pipe / metallic reheating surface

2) Values determined with upper air sections; stove cladding is heat emitting.