

TILE STOVE INSERTS FROM BRUNNER




HKD 2.2k

State: 2018-05-15




BRUNNER®
made in germany.

Dimension sheets - HKD 2.2k

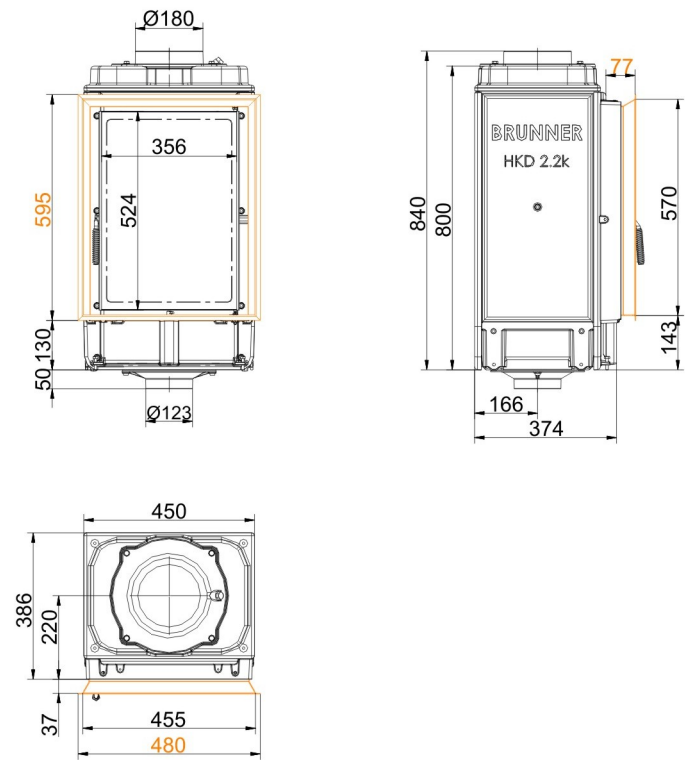


... flat with steel door frame

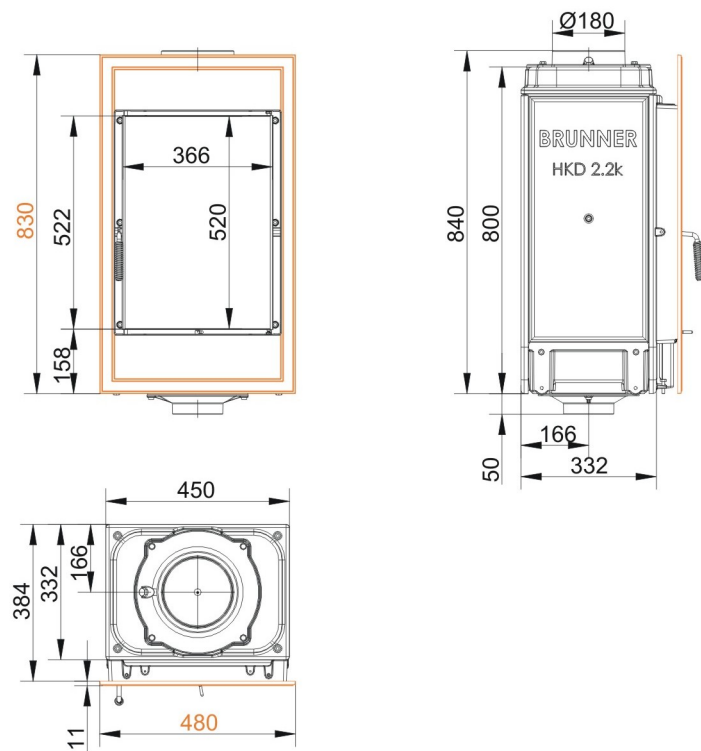


... flat with cast iron front plate

Dimension sheets - HKD 2.2k

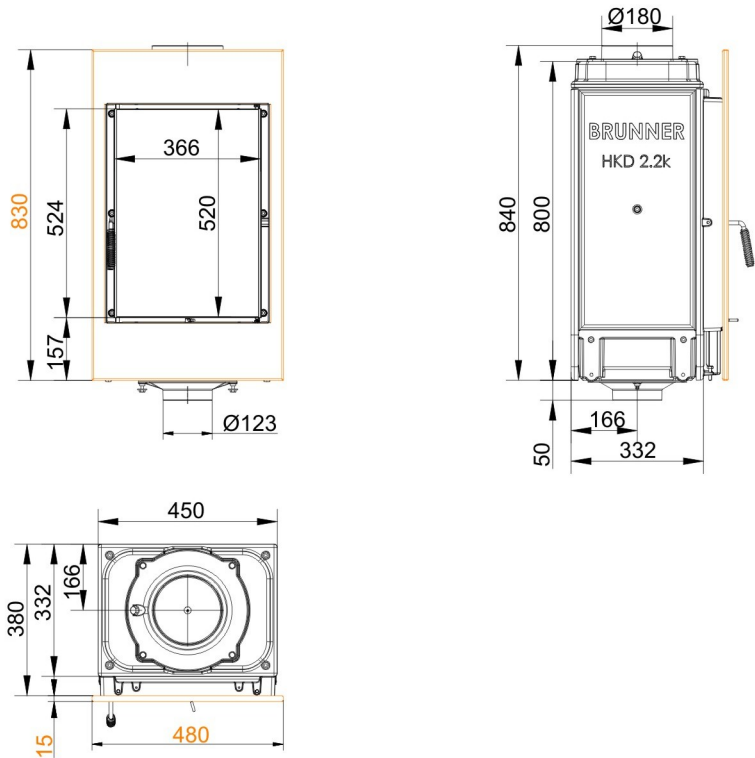


... flat with steel front plate

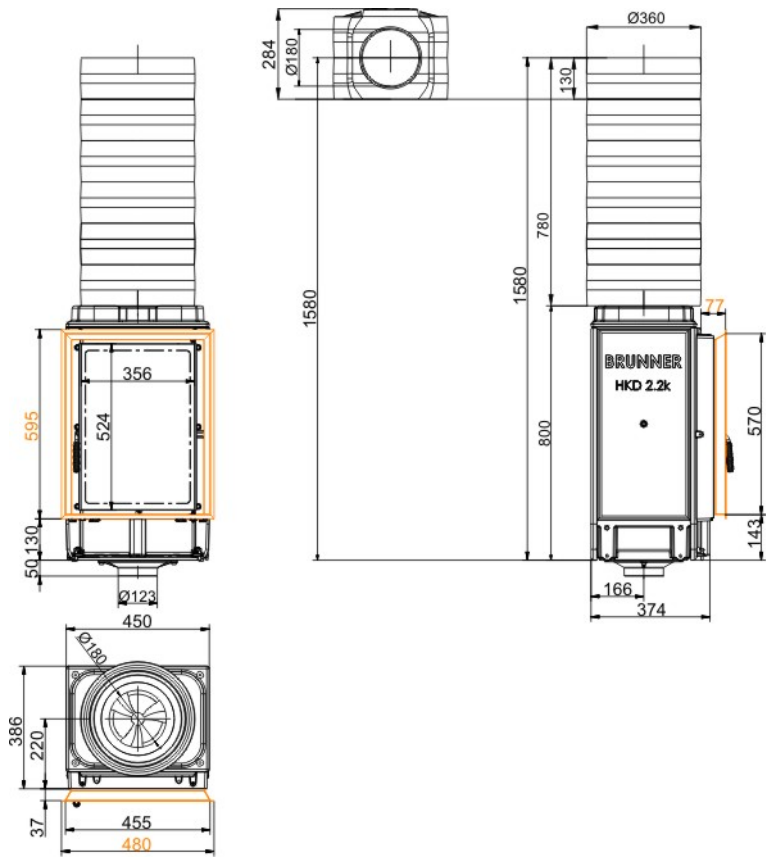


... flat with MAS 360 and steel cover

Dimension sheets - HKD 2.2k

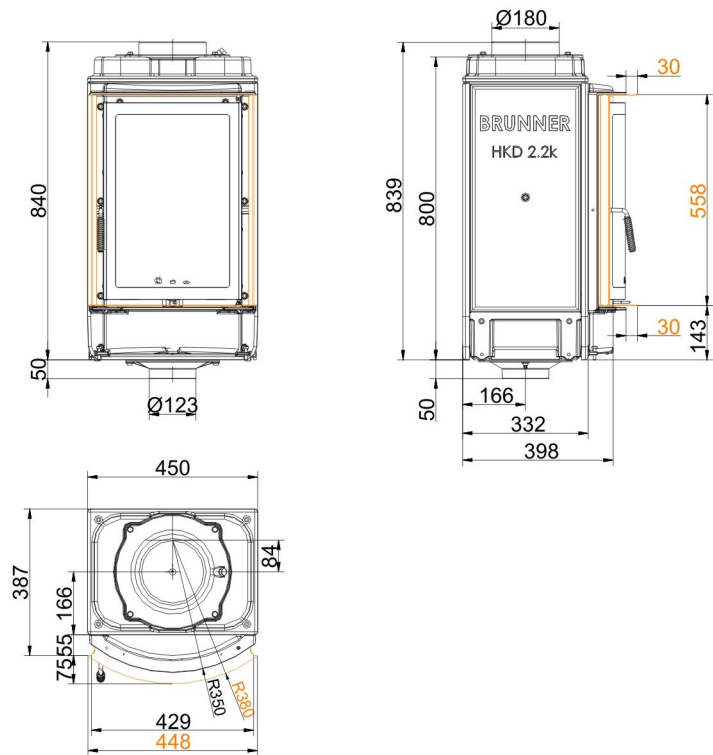


... round with steel door frame

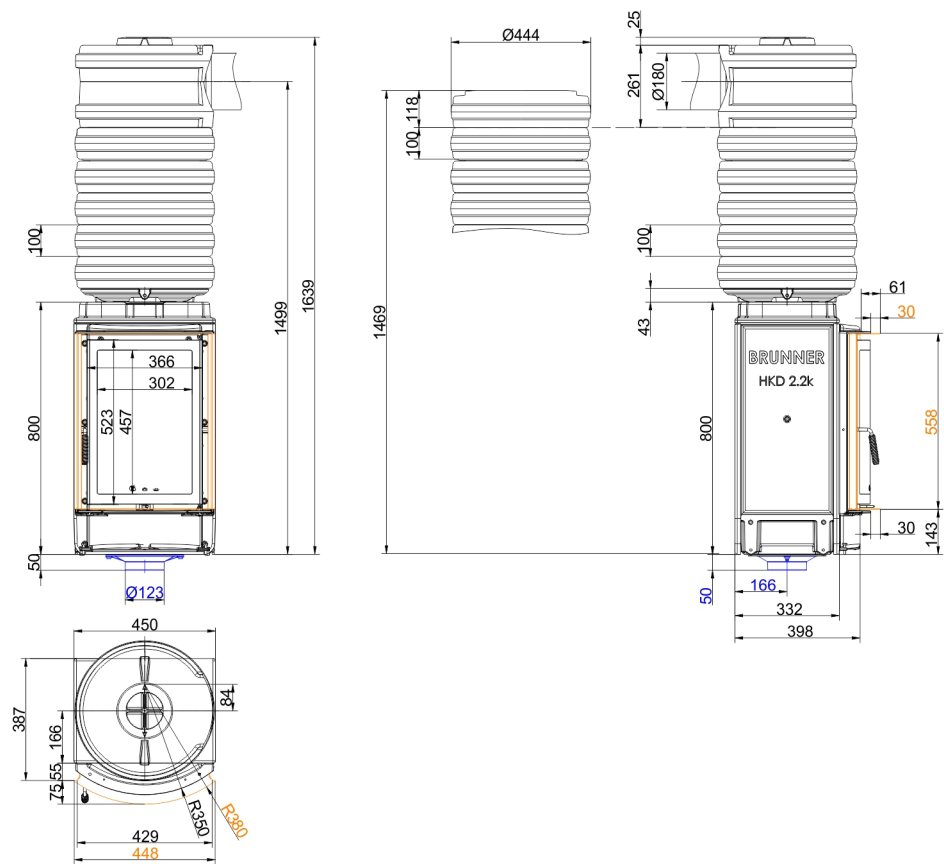


... short, round with MAS 440

Dimension sheets - HKD 2.2k

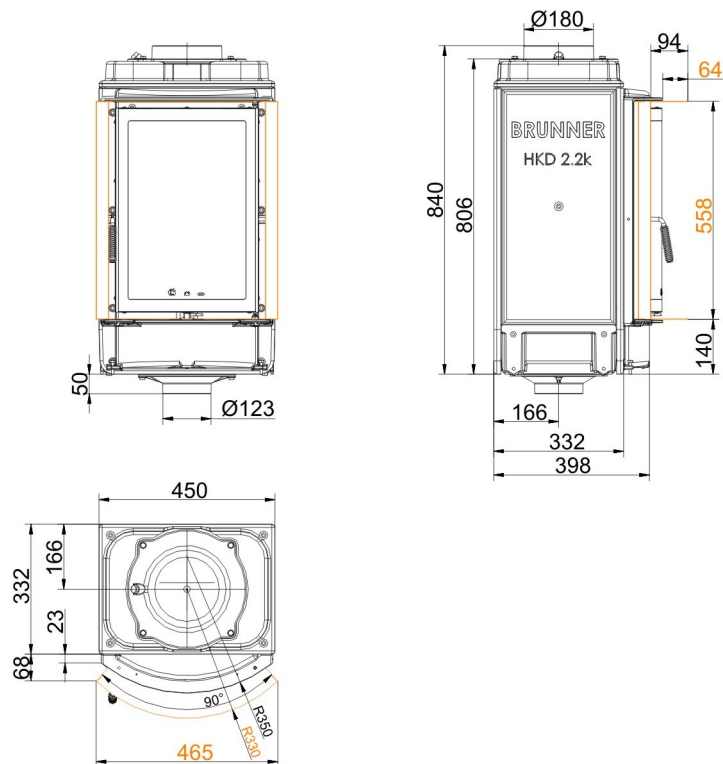

... short, round with mounting frame Jasba R330

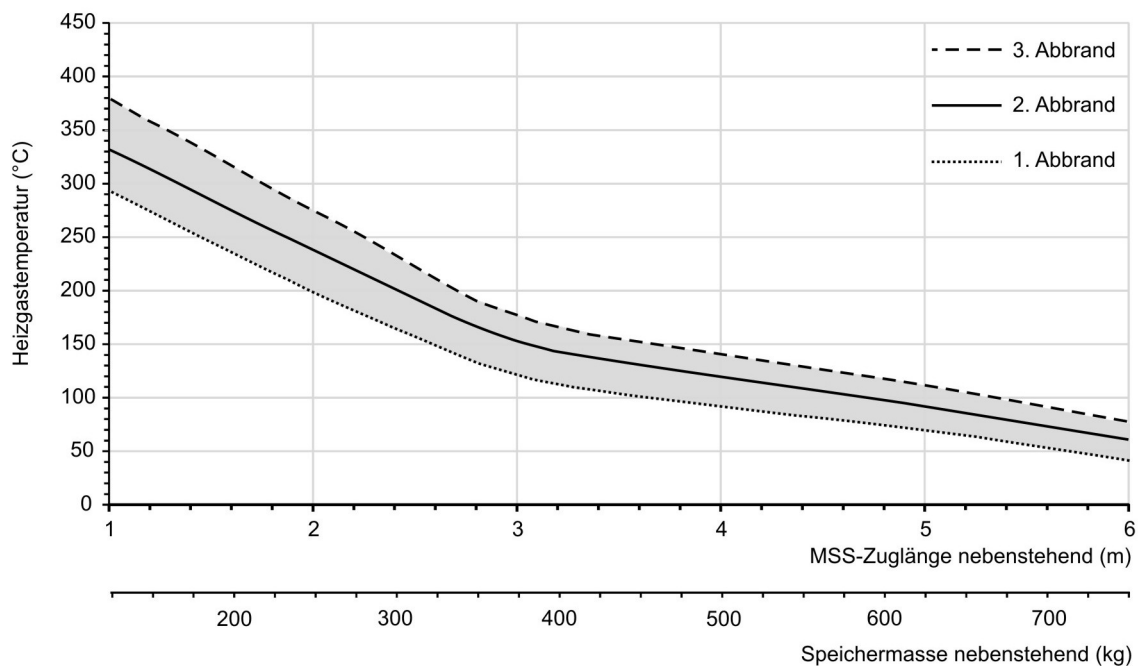

Design characteristics for adjacent storage mass

We suggest for CAD planing Palette CAD. Permanent updated drawings: www.brunner.de
Frames / front versions are marked colored.

Planning and installation - HKD 2.2k

Tested according to		EN 13229 W	EN 13229 WA
Values measured at		Rated capacity	Accumulation
Suitable for all construction types according to rules		OK	OK
EEL		115.7	115.7
Data for functional demonstration			
Rated heat power	kW	7	-
Fire wood volume	kg/h	2.5	4
Combustion performance	kW	8	17
Flue gas mass flow	g/s	7.5	17
Outlet temperature (before heating surface)	°C	530	540
Flue gas temperature after:			
1 x adjoining cast iron radiator (GNF 8/10)	°C	165	185
6 x accumulation rings (MAS) ¹⁾	°C	220	-
3,3 m ceramic accumulator ²⁾	°C	-	180
2,2 m accumulation stones (MSS) ²⁾	°C	-	215
Necessary supply pressure	Pa	12	15
Combustion air consumption	m³/h	25	45
Combustion air connection Ø	mm	125	125
Heat distribution			
Insert / heat accumulator	%	45 / 40 - 45	45 / 40 - 45
Glass pane (single / double)	%	15 / 10	15 / 10
Cross-section of gratings ³⁾			
Convection air	cm²	500 / 250 / 550	500 / 250 / 550
Supply air	cm²	500 / 250 / 550	500 / 250 / 550
Minimal distances of the fireplace			
to insulation layer	cm	6	6
to mounting floor	cm	15	15
Thermal insulation without / with air gratings ⁴⁾			
Mounting wall	cm	14 / 10	14 / 10
Floor	cm	0	0
Ceiling	cm	22 / 16	22 / 16
Brick lining for combustible wall	cm	10	10
Weight			
Fireplace / combustion chamber	kg	192 / 49	
Meets requirement/limit values for:			
Germany/ Austria / Suisse / Norway	1.BImSchV (Stufe 2) / 15a BVG (2015) / LRV / -		

1) Damper flap recommended

2) Approximate value. Determination according to design characteristics for adjacent storage mass or proof of function provided by calculation

3) for fireplace inserts / flue gas pipe / metallic reheating surface

4) Values determined with upper air sections; stove cladding is heat emitting.